



上海川源机械工程有限公司
Shanghai GSD Industrial Co., Ltd

GHS

单级单吸卧式离心泵

GHS single-stage single-suction horizontal centrifugal pump



GHS单级单吸卧式离心泵

GHS single-stage single-suction horizontal centrifugal pump



特点 Features

- GHS系列单级单吸离心泵依据EN733 (DIN24255) 标准设计。
- GHS结构简单，性能可靠，体积小，重量轻，抗汽蚀性能好，电耗低，使用维修方便。
- GHS为后开式，拆开泵盖和叶轮时不需拆卸吸水和排出管路，维修方便。
- 零件通用性广，全系列46种型号，只采用六种轴，零件通用，互换性好。
- 规格相同的泵因改变叶轮外径（切割叶轮）而有不同的性能（在泵型号上加上ABC表示）。
- 从驱动端看，泵为顺时针方向旋转。
- The GHS series single-stage single-suction horizontal centrifugal pump is designed in accordance with EN733(DIN24255).
- The GHS has simple structure, reliable performance, small volume, light weight, good pitting resistance, low power consumption and easy operation and maintenance.
- The GHS is of the rear-open type. The suction and discharge pipes needn't be taken down for pump cover and impeller disassembly.
- The GHS parts are universally replaceable. The whole series have 46 models that only adopt six types of bearing. All parts may be universally exchanged.
- The pumps of the same specifications may have different performances (indicated with ABC on pump models) if changed in impeller outer diameters (cutting impeller).
- The pump rotates in the clockwise direction if viewed from the driven end.

用途 Application

GHS系列单级单吸卧式离心泵适用于输送清水或物理化学性质类似于水的液体，工厂、矿山、城市给排水、空调、消防和农田排灌等。

The GHS series single-stage single-suction horizontal centrifugal pump is used to convey clean water and the liquid with chemical and physical properties similar to water. It may be applied in water supply and drainage for factories, mines and citisair conditioning, fire fighting and agricultural irrigation .



主要零件介绍

- 泵壳：底脚支承结构，螺旋形涡壳。涡室、底脚、进水法兰和出口法兰铸成一个整体，法兰可按工制或美制钻孔。
- 叶轮：闭式叶轮，采用优秀水力模型设计，保证泵的性能与效率，并进行动平衡试验。
- 悬架（轴承部件）：悬架内装有轴承，全系列共有6种轴规格，轴承用润滑脂（油）润滑。
- 轴封：使用机械密封结构，可选用国产及进口优质机封。
- 电机：选用优质高效节能电机，噪音低，振动小，也可根据需要配用防爆或特殊要求电机，泵通过弹性联轴器由电机直接驱动。

工作条件

- 出口口径：DN32～300mm。
- 流量范围：4.5～1660 m³/h。
- 扬程范围：5.2～150m。
- 转速：1450 r/min和2900 r/min(50Hz电源)。
- 输送介质温度：-10℃～85℃(超过温度范围，请向我司咨询)。
- 工作压力：一般为1.6MPa，如需提高(最高可承受2.5 MPa)，请在订货时说明。


The instruction of main parts

- Pump case: Foot support structure and spiral volute chamber, with volute chamber, foot, influent flange and discharge flange cast into an integrity. The flanges may be drilled accordance with the metric or U.S. system.
- Impeller: Closed impeller designed in the excellent hydraulic model to guarantee pump performance and efficiency. The dynamic balance test shall be conducted.
- Suspension fork (bearing part): The suspension fork is installed with bearing inside. There are totally 6 bearing specifications for the whole series. The bearings shall be lubricated by lubricating oil or grease.
- Shaft seal: Using mechanical seal. Domestic and imported high-quality mechanical seal may also be adopted.
- Electrical motor: High-quality motor with low noise and small vibration. explosion-proof motor or other motors with special requirements may be adopted if necessary. The pump is driven directly by electrical motor with elastic coupling.

Working condition

- Outlet : DN32～300 mm.
- Capacity: 4.5～1660 m³/h.
- Head: 5.2～150m.
- Rotation Speed: 1450 r/min and 2900 r/min (50Hz power supply),
- Conveyance medium temperature: - 10℃～85℃ (consult us if the temperature is beyond the above scope).
- Working pressure: 1.6MPa is standard,available for up to max working pressure 2.5MPa(please specify in your order)


结构简图 Construction

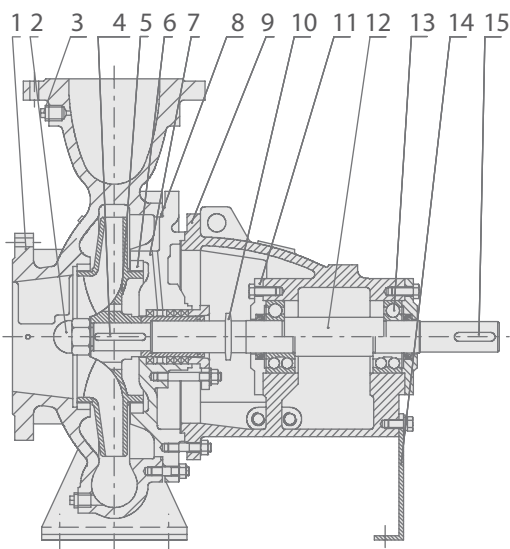

NO.	名称	Name	材质 Material
1	泵体	Pump body	标配HT250 选配QT400, QT450, 1Cr18Ni9Ti, 0Cr18Ni9, ZG35, ZQA19-4
2	盖形螺母	Cap nut	HT250
3	丝堵	Pipe plug	HT250
4	叶轮平键	Impeller flat key	45
5	叶轮	Impeller	标配HT250 选配QT400, QT450, ZG35, ZQSn5-5-5, 1Cr18Ni9Ti, 0Cr18Ni9, ZQA19-4
6	密封环	Seal ring	
7	泵盖	Pump cover	HT250
8	泵体O型圈	Pump body O-ring	
9	悬架	Suspension	HT250
10	挡水圈	Water deflector	NBR
11	轴盖	Shaft cap	HT250
12	轴	Shaft	标配2Cr13 选配45, ZG35, 1Cr17Ni2, 1Cr18Ni9Ti
13	轴承	Bearing	
14	悬架支撑	Suspension support	HT250
15	泵联轴器键	Pump connection flat key	45




密封环结构 Seal ring structure

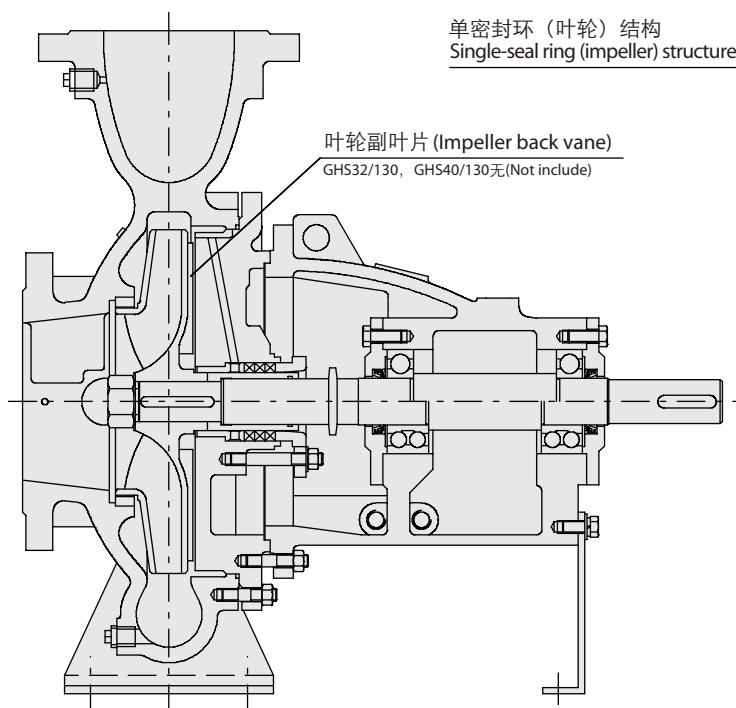

泵规格
Pump specifications

GHS 32/130
GHS 40/130
GHS 50/130
GHS 65/130
GHS 32/160
GHS 40/160
GHS 50/160
GHS 65/160
GHS 80/160
GHS 32/200
GHS 40/200
GHS 50/200
GHS 65/200
GHS 80/200
GHS 100/200
GHS 125/200
GHS 32/260
GHS 40/260
GHS 50/260
GHS 65/260
GHS 80/260
GHS100/260
GHS125/260

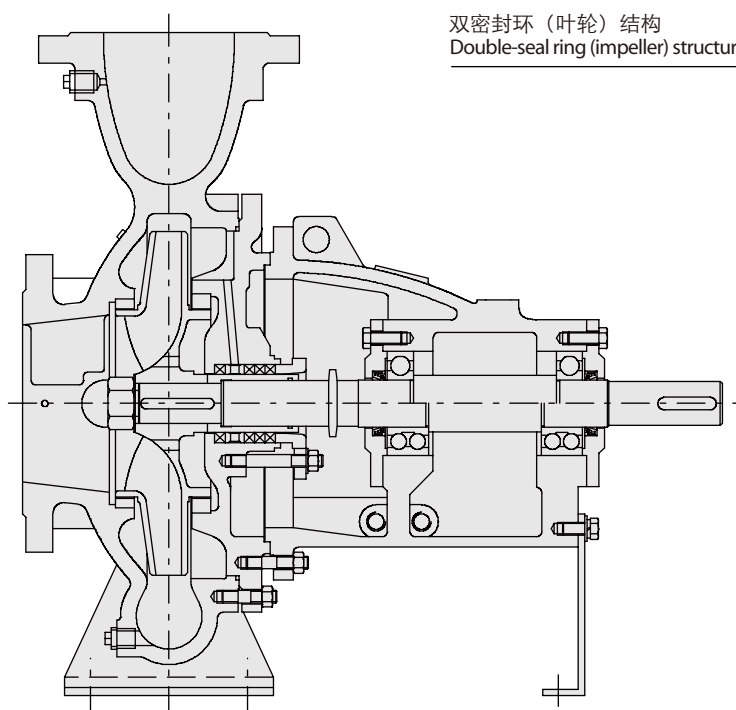

泵规格
Pump specifications

GHS150/200
GHS150/260
GHS200/260
GHS 40/320
GHS 50/320
GHS 65/320
GHS 80/320
GHS100/320
GHS125/320
GHS150/320
GHS200/320
GHS250/320
GHS 80/400
GHS100/400
GHS125/400
GHS150/400
GHS200/400
GHS250/400
GHS300/400
GHS125/500
GHS150/500
GHS200/500
GHS250/500

单密封环结构: 叶轮进水面设有密封环, 背面设有副叶片, 依靠副叶片平衡轴向力


双密封环结构: 叶轮进水面设有密封环, 背面设有密封环, 平衡孔, 依靠平衡孔平衡轴向力

Single-seal ring structure: the influent side of impeller is set with seal ring, and the back is set with back vane for balancing axial thrust

Double-seal ring structure: the influent side of impeller is set with seal ring, and the back is set with seal ring and balance hole for balancing axial thrust




轴承结构及润滑方式 Bearing structure and lubrication mode

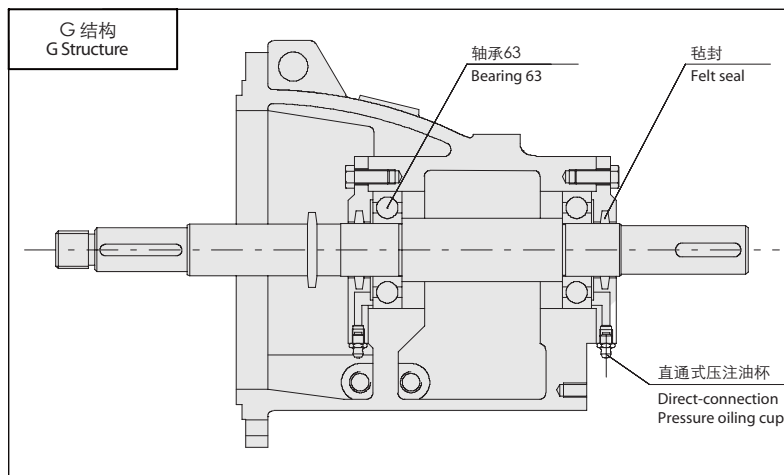


G结构:
脂润滑结构, 适用所有除H结构和P结构的机型(标准配置)。

G structure:
Grease lubrication structure, suitable for all pump models, except H & P structures (Standard).

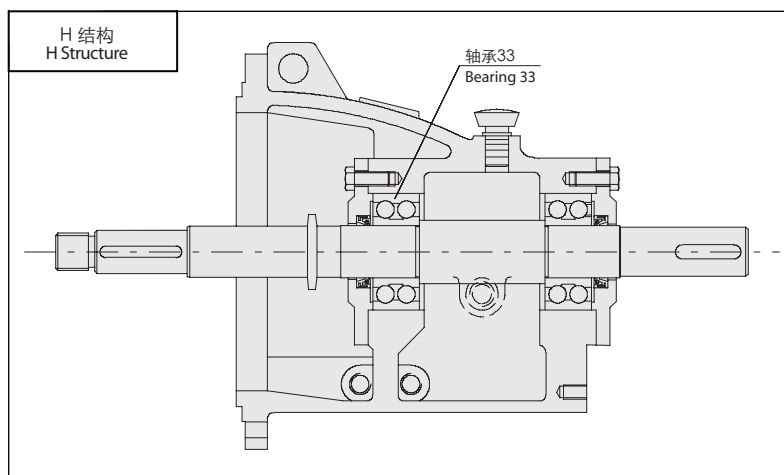

H结构:
油润滑结构,
单指GHS40/320/2P; GHS50/320/2P;
GHS65/320/2P; GHS80/320/2P四种机型。

H structure:
Oil lubrication structure,
Only suitable for pump models of
GHS40/320/2P, GHS50/320/2P, GHS65/320/2P
and GHS80/320/2P.

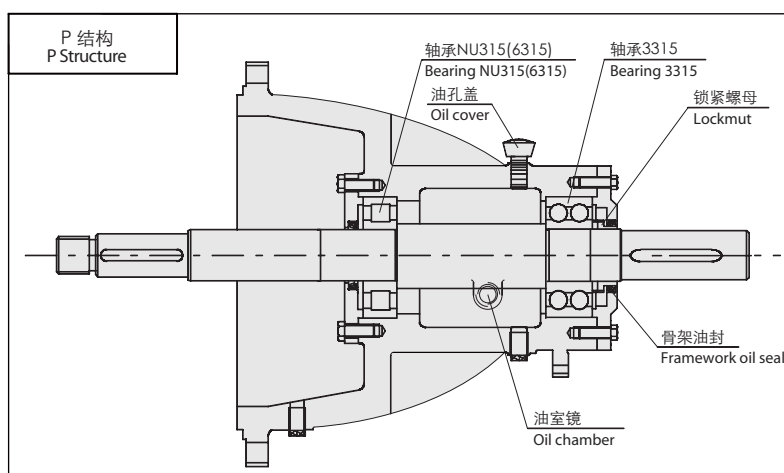


P结构:
油(脂)润滑结构,
单指GHS300/320; GHS300/400;
GHS250/500 三种机型。


P structure:
Oil(Grease) lubrication structure,
Only suitable for pump models of
GHS300/320, GHS300/400, GHS250/500.





机封结构 Seal structure

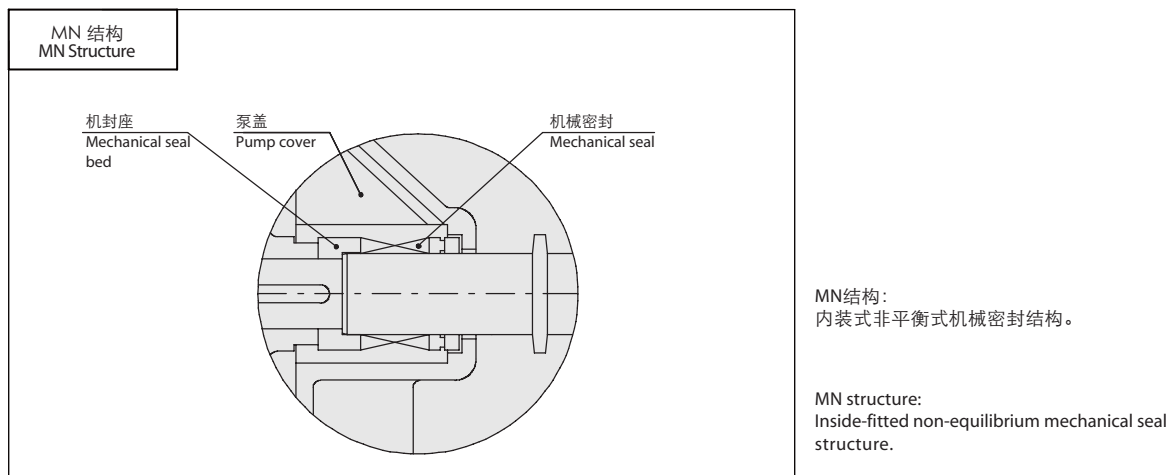

型号说明 Type description

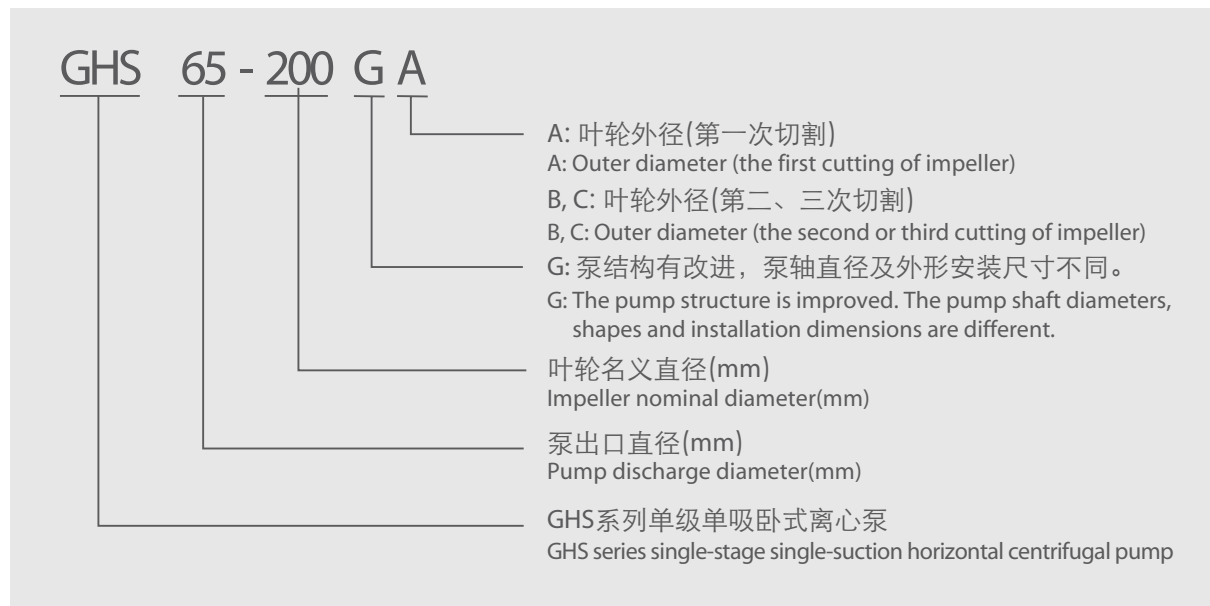

性能曲线 Performance curves

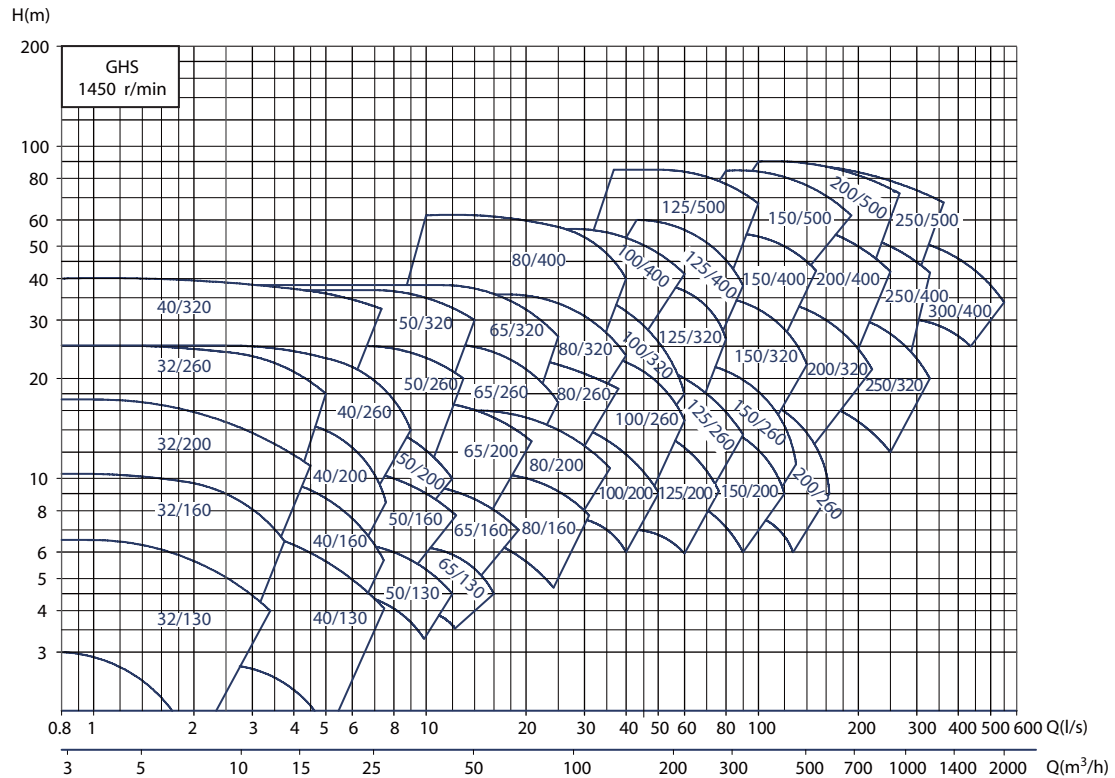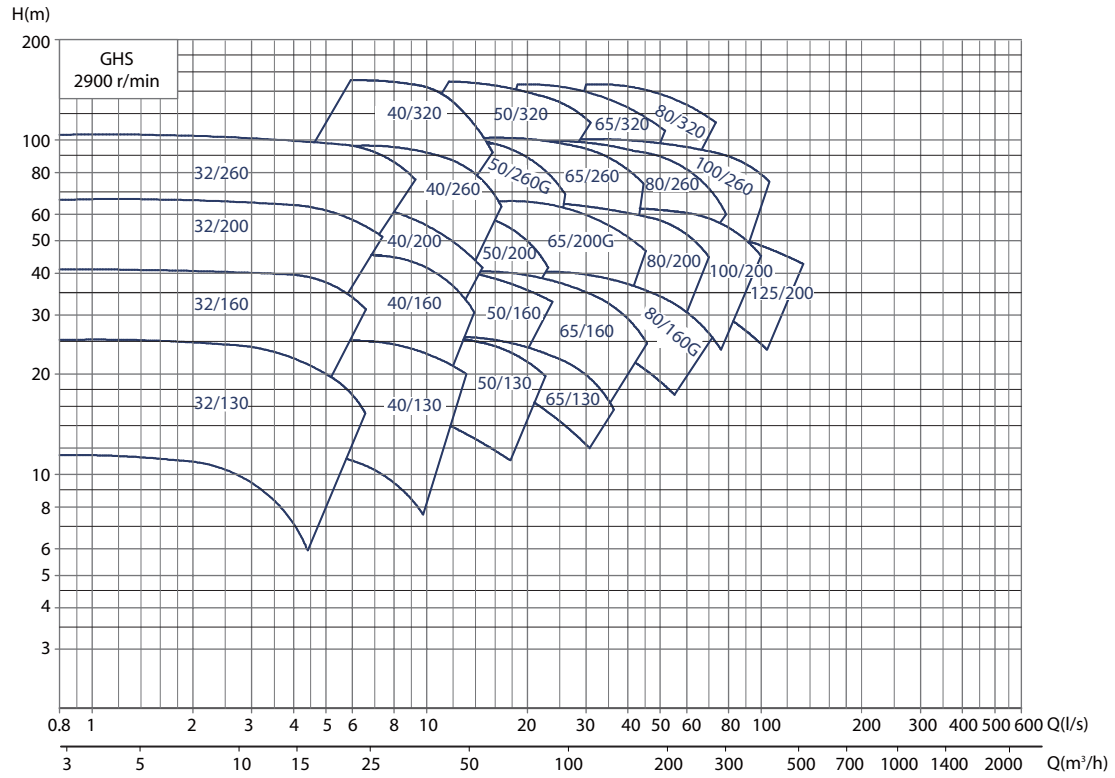

性能参数 Performance parameters

(2P)

泵型号 Pump model	流量 Capacity		扬程 Head h (m)	转速 Speed n (r/min)	功率 Power		效率 Eff. η (%)	必需汽 蚀余量 NPSHr (m)	泵口径 Pump diameter (mm)		泵重量 Weight (kg)
	m ³ /h	l/s			轴功率 Shaft power (kW)	电机 Motor (kW)			吸入 Suction	排出 Discharge	
GHS32-130	9	2.5	24.9	2900	1.23	2.2	44	1.8	50	32	27.5
	15	4.2	23		1.47	2.2	55	2.0			
	18	5.0	21		1.58	2.2	56	2.5			
GHS32-130A	8.5	2.4	21.2	2900	1.04	2.2	43.5	1.8	50	32	27.5
	14	3.9	19		1.23	2.2	54	1.95			
	17	4.7	17.3		1.32	2.2	53	2.3			
GHS32-130B	7.8	2.2	17.3	2900	0.89	1.5	42	1.8	50	32	27.5
	13	3.6	15.3		1.02	1.5	51	1.88			
	15.5	4.3	13.8		1.07	1.5	52	2.08			
GHS32-160	10.8	3.0	40	2900	2.50	5.5	47	1.2	50	32	35
	18	5.0	38.5		3.23	5.5	58.5	2			
	21.6	6.0	36		3.59	5.5	59	2.6			
GHS32-160A	10.5	2.9	35.7	2900	2.22	4	46	1.9	50	32	35
	17	4.7	33		2.78	4	55	1.95			
	21	5.8	30		3.06	4	56	2.4			
GHS32-160B	9.8	2.7	32.4	2900	1.97	4	44	1.9	50	32	35
	16	4.4	29.5		2.43	4	53	1.95			
	19.5	5.4	27		2.66	4	54	2.2			
GHS32-200	10.8	3.0	66	2900	4.51	11	43	1.3	50	32	41
	18	5.0	61.5		5.74	11	52.5	1.9			
	21.6	6.0	57		6.27	11	53.5	2.3			
GHS32-200A	10.2	2.8	58.2	2900	4.04	7.5	40	1.8	50	32	41
	17	4.7	55.8		4.87	7.5	53	1.95			
	20.4	5.7	52.2		5.47	7.5	53	2.2			
GHS32-200B	9.9	2.8	51.5	2900	3.65	7.5	38	1.8	50	32	41
	16.5	4.6	48		4.40	7.5	49	1.9			
	19.8	5.5	45		4.97	7.5	48.8	2.15			
GHS32-260	13.2	3.7	102	2900	11.21	18.5	32.7	1.8	50	32	59
	22	6.1	96		14.10	18.5	40.8	2.7			
	26.4	7.3	89		15.61	18.5	41	3.3			
GHS32-260A	12.6	3.5	92.5	2900	10.11	15	31.4	2.1	50	32	59
	21	5.8	88		12.58	15	40	2.2			
	25.2	7.0	83		13.89	15	41	2.5			
GHS32-260B	12.3	3.4	84.5	2900	9.43	15	30	2.15	50	32	59
	20.5	5.7	81		11.75	15	38.5	2.16			
	24.6	6.8	77		12.90	15	40	2.38			
GHS40-130	18	5.0	26	2900	2.09	4	61	1.8	65	40	30
	30	8.3	24.5		2.65	4	75.5	2.0			
	36	10.0	23		2.91	4	77.5	2.4			
GHS40-130A	16.8	4.7	22.5	2900	1.74	4	59	1.8	65	40	30
	28	7.8	21		2.29	4	70	2			
	33.6	9.3	20		2.54	4	72	2.25			
GHS40-130B	15.5	4.3	18.5	2900	1.47	3	53	1.8	65	40	30
	26	7.2	17.5		1.91	3	65	1.9			
	31	8.6	16.5		2.14	3	65	2.15			
GHS40-160	18	5.0	41	2900	3.72	7.5	54	2.1	65	40	36
	30	8.3	38.5		4.91	7.5	64	2.5			
	36	10.0	35.5		5.40	7.5	64.5	3.6			
GHS40-160A	17	4.7	36	2900	3.21	5.5	52	2.1	65	40	36
	28.5	7.9	33.5		4.00	5.5	65	2.5			
	34	9.4	31		4.63	5.5	62	3.25			
GHS40-160B	16	4.4	31.5	2900	2.86	4	48	2.05	65	40	36
	26.5	7.4	29		3.52	4	62	2.4			
	32	8.9	25.5		3.77	4	59	2.9			
GHS40-200	18	5.0	64	2900	6.54	11	48	1.85	65	40	44
	30	8.3	61		8.38	11	59.5	2.0			
	36	10.0	58.6		9.27	11	62	2.7			
GHS40-200A	17	4.7	58.5	2900	5.58	11	48.5	1.8	65	40	44
	29	8.1	56		7.25	11	61	1.95			
	34.5	9.6	53.5		7.98	11	63	2.45			
GHS40-200B	16.5	4.6	52.5	2900	5.13	11	46	1.8	65	40	44
	27.5	7.6	49		6.22	11	59	1.9			
	33	9.2	47		6.92	11	61	2.2			
GHS40-260	21.6	6.0	98.5	2900	12.88	22	45	1.8	65	40	61
	36	10.0	95.5		16.72	22	56	2.0			
	43.2	12.0	91		18.15	22	59	2.5			
GHS40-260A	19.5	5.4	89	2900	11.25	18.5	42	1.8	65	40	61
	32	8.9	87		14.31	18.5	53	1.95			
	38.5	10.7	84		16.01	18.5	55	2.35			



性能参数 Performance parameters

(2P)

泵型号 Pump model	流量 Capacity		扬程 Head h (m)	转速 Speed n (r/min)	功率 Power		效率 Eff. η (%)	必需汽 蚀余量 NPSHr (m)	泵口径 Pump diameter (mm)		泵重量 Weight (kg)
	m ³ /h	l/s			轴功率 Shaft power (kW)	电机 Motor (kW)			吸入 Suction	排出 Discharge	
GHS40-260B	18.5	5.1	80	2900	10.08	18.5	40	1.8	65	40	61
	30.5	8.5	78		12.22	18.5	53	1.9			
	37	10.3	76		14.18	18.5	54	2.2			
GHS40-320	21.6	6.0	150	2900	25.95	37	34	2	65	40	95.8
	36	10.0	139		30.97	37	44	2.8			
	43.2	12.0	127		33.20	37	45	3.8			
GHS40-320A	19.44	5.4	124	2900	19.31	30	34	1.9	65	40	95.8
	32.4	9.0	115		23.60	30	43	2.9			
	38.88	10.8	107		25.75	30	44	3.8			
GHS40-320B	17.28	4.8	109	2900	16.03	22	32	1.7	65	40	95.8
	28.8	8.0	102		19.51	22	41	2.6			
	34.56	9.6	95		21.29	22	42	3.2			
GHS50-130	36	10.0	26	2900	3.78	7.5	67.5	2.5	65	50	34
	60	16.7	23.5		5.05	7.5	76	3.2			
	72	20.0	21.5		5.66	7.5	74.5	4			
GHS50-130A	33.5	9.3	21.5	2900	3.04	5.5	64.5	2.5	65	50	34
	56	15.6	18.5		4.00	5.5	70.5	3.1			
	67.5	18.8	15.5		4.35	5.5	65.5	3.6			
GHS50-130B	31	8.6	18.5	2900	2.56	5.5	61	2.5	65	50	34
	52	14.4	16.5		3.34	5.5	70	2.9			
	62	17.2	15		3.67	5.5	69	3.3			
GHS50-160	40	11.1	42.5	2900	6.76	11	68.5	2.5	65	50	38
	65	18.1	39		9.08	11	76	3.5			
	78	21.7	35.5		10.26	11	73.5	4.2			
GHS50-160A	38	10.6	38	2900	5.62	11	70	2.5	65	50	38
	61.5	17.1	34.5		7.60	11	76	3.3			
	74	20.6	30		8.17	11	74	3.9			
GHS50-160B	35.5	9.9	34	2900	4.63	11	71	2.35	65	50	38
	58	16.1	30.5		6.42	11	75	3.1			
	69.5	19.3	28		7.26	11	73	3.7			
GHS50-200	36	10.0	61	2900	9.34	18.5	64	1.9	65	50	46
	60	16.7	55		12.84	18.5	70	3.2			
	72	20.0	51		14.39	18.5	69.5	4.1			
GHS50-200A	34.5	9.6	57	2900	8.93	15	60	2.5	65	50	46
	57.5	16.0	53		11.53	15	72	3.1			
	69	19.2	50.5		13	15	73	3.75			
GHS50-200B	33	9.2	49.5	2900	7.18	15	62	2.5	65	50	46
	54.5	15.1	43		9.39	15	68	3.0			
	65.5	18.2	38		10.27	15	66	3.5			
GHS50-260G	40	11.1	103	2900	20.78	37	54	2.5	65	50	63
	65	18.1	97.5		27.18	37	63.5	3.5			
	78	21.7	91		30.68	37	63	4.2			
GHS50-260GA	38.5	10.7	91.5	2900	19.19	30	50	2.4	65	50	63
	63	17.5	85.5		24.45	30	60	3.3			
	75.5	21.0	80		26.75	30	61.5	3.9			
GHS50-260GB	37	10.3	84	2900	16.93	30	50	2.3	65	50	63
	60.5	16.8	77		21.14	30	60	3.2			
	72.5	20.1	71		24.17	30	58	3.9			
GHS50-320	54	15.0	146	2900	40.51	75	53	3.5	65	50	101
	90	25.0	137		55.05	75	61	7.0			
	108	30.0	130		61.67	75	62	8.0			
GHS50-320A	48.6	13.5	130	2900	34.41	75	50	3.3	65	50	101
	81	22.5	124		45.59	75	60	6.5			
	97.2	27.0	117		50.77	75	61	7.5			
GHS50-320B	46.8	13.0	105	2900	25.74	45	52	2.5	65	50	101
	78.12	21.7	98		35.04	45	59.5	5.0			
	93.6	26.0	91		39.32	45	59	6.5			
GHS65-130	60	16.7	25.5	2900	6.27	11	69	3.0	80	65	39
	100	27.8	21		8.17	11	70	3.5			
	120	33.3	16		8.86	11	59	4.5			
GHS65-130A	56	15.6	21.8	2900	5.11	11	65	3	80	65	39
	93.5	26.0	17.5		6.37	11	70	3.5			
	112.5	31.3	13		6.99	11	57	4.1			
GHS65-130B	52	14.4	18	2900	4.08	7.5	62.5	3	80	65	39
	86.5	24.0	13.7		4.89	7.5	66	3.3			
	104	28.9	10.6		5.27	7.5	57	3.75			
GHS65-160	64.8	18.0	39	2900	9.97	18.5	69	3.6	80	65	43
	108	30.0	33.5		12.71	18.5	77.5	4.2			
	129.6	36.0	29		14.22	18.5	72	5.2			



性能参数 Performance parameters

(2P)

泵型号 Pump model	流量 Capacity		扬程 Head h (m)	转速 Speed n (r/min)	功率 Power		效率 Eff. η (%)	必需汽 蚀余量 NPSHr (m)	泵口径 Pump diameter (mm)		泵重量 Weight (kg)
	m ³ /h	l/s			轴功率 Shaft power (kW)	电机 Motor (kW)			吸入 Suction	排出 Discharge	
GHS65-160A	57	15.8	34	2900	8.38	15	63	3.6	80	65	43
	95	26.4	30.5		10.66	15	74	4.1			
	114	31.7	27		11.81	15	71	4.8			
GHS65-160B	53.5	14.9	30	2900	7.28	11	60	3.6	80	65	43
	89	24.7	25.5		8.83	11	70	3.95			
	107	29.7	22.5		9.50	11	69	4.5			
GHS65-200G	66	18.3	64	2900	17.7	30	65	3.0	80	65	70
	110	30.6	59		23.72	30	74.5	3.9			
	132	36.7	54.5		26.66	30	73.5	5.3			
GHS65-200GA	63	17.5	60	2900	16.08	30	64	3.0	80	65	70
	105.5	29.3	55.5		21.55	30	74	3.9			
	126.5	35.1	52		24.37	30	73.5	5.3			
GHS65-200GB	60	16.7	50	2900	13.18	22	62	3.0	80	65	70
	100	27.8	45.5		16.41	22	75.5	3.6			
	120	33.3	42		18.30	22	75	4.4			
GHS65-260	72	20.0	98	2900	29.79	55	64.5	3.3	80	65	81
	120	33.3	90		42.29	55	73	4.5			
	144	40.0	83		44.59	55	73	5.4			
GHS65-260A	69.5	19.3	92	2900	26.79	45	65	3.25	80	65	81
	116	32.2	86		38.81	45	70	4.4			
	139	38.6	79		41.53	45	72	4.95			
GHS65-260B	67	18.6	82.5	2900	23.89	45	63	3.2	80	65	81
	111.5	31.0	76		32.50	45	71	4.25			
	133.5	37.1	71		36.88	45	70	4.95			
GHS65-320	81	22.5	147	2900	60.05	110	54	3.8	80	65	110
	135	37.5	131		76.45	110	63	4.4			
	162	45.0	115		84.56	110	60	5.5			
GHS65-320A	81	22.5	120	2900	48.13	90	55	3.7	80	65	110
	135	37.5	108		64.04	90	62	4.3			
	162	45.0	97		73.78	90	58	5.2			
GHS65-320B	81	22.5	107	2900	40.00	75	59	3.5	80	65	110
	135	37.5	94		56.65	75	61	4.3			
	162	45.0	83		67.81	75	54	4.8			
GHS80-160G	100	27.8	39.5	2900	15.15	30	71	3.3	100	80	54
	162	45.0	35		19.80	30	78	4.0			
	195	54.2	31		21.95	30	75	5.0			
GHS80-160GA	95	26.4	33	2900	13.13	22	65	3.3	100	80	54
	153.5	42.6	28		16.26	22	72	3.85			
	185	51.4	24		17.78	22	68	4.6			
GHS80-160B	89	24.7	29.5	2900	11.17	18.5	64	3.25	100	80	54
	144.5	40.1	25		13.29	18.5	74	3.7			
	174	48.3	21		14.22	18.5	70	4.3			
GHS80-200	115	31.9	60	2900	26.84	45	70	4.0	100	80	70
	190	52.8	55		36.49	45	78	5.1			
	225	62.5	50		41.12	45	74.5	6.2			
GHS80-200A	110	30.6	57	2900	25.11	37	68	4.0	100	80	70
	182	50.6	53.5		34.44	37	77	4.9			
	215.5	59.9	44.5		37.31	37	70	5.85			
GHS80-200B	105	29.2	49.5	2900	20.82	37	68	4.0	100	80	70
	173	48.1	45		27.90	37	76	4.7			
	205	56.9	40		31.90	37	70	5.5			
GHS80-260	115	31.9	97	2900	46.74	75	65	4.0	100	80	91
	190	52.8	88		60.71	75	75	5.4			
	225	62.5	81		67.53	75	73.5	6.5			
GHS80-260A	111	30.8	91.5	2900	43.90	75	63	3.95	100	80	91
	183.5	51.0	81.5		54.30	75	75	5.2			
	217.5	60.4	73		59.23	75	73	6.25			
GHS80-260B	106.5	29.6	79	2900	37.56	75	61	3.9	100	80	91
	176.5	49.0	68.5		45.10	75	73	5			
	209	58.1	60		48.10	75	71	6			
GHS80-320	126	35.0	146	2900	78.28	132	64	5.6	100	80	120
	210	58.3	134		103.56	132	74	6.3			
	252	70.0	121		113.75	132	73	7			
GHS80-320A	117	32.5	125	2900	64.24	110	62	6.1	100	80	120
	195	54.2	114		82.93	110	73	6.3			
	234	65.0	103		91.16	110	72	6.9			
GHS80-320B	108	30.0	104	2900	47.79	90	64	5	100	80	120
	180	50.0	95		63.79	90	73	5.8			
	216	60.0	85		71.43	90	70	6.3			



性能参数 Performance parameters

(2P/4P)

泵型号 Pump model	流量 Capacity		扬程 Head h (m)	转速 Speed n (r/min)	功率 Power		效率 Eff. η (%)	必需汽蚀余量 NPSHr (m)	泵口径 Pump diameter (mm)		泵重量 Weight (kg)
	m ³ /h	l/s			轴功率 Shaft power (kW)	电机 Motor (kW)			吸入 Suction	排出 Discharge	
GHS100-200	180	50.0	61	2900	41.53	75	72	4.0	125	100	85
	295	81.9	51.5		52.37	75	79	5.3			
	340	94.4	42		52.55	75	74	6.3			
GHS100-200A	172.5	47.9	51	2900	34.72	55	69	3.95	125	100	85
	273	75.8	42		42.20	55	74	4.9			
	325.5	90.4	36		46.25	55	69	5.95			
GHS100-200B	164	45.6	46	2900	30.21	45	68	3.9	125	100	85
	260	72.2	35		35.40	45	70	4.8			
	310	86.1	31		39.06	45	67	5.6			
GHS100-260 GHS100-260G	190	52.8	97	2900	70.69	110	71	3.8	125	100	106
	295	81.9	86		90.91	110	76	5.2			
	350	97.2	80		103.04	110	74	6.5			
GHS100-260A GHS100-260GA	183.5	51.0	85.5	2900	61.92	110	69	3.75	125	100	106
	285	79.2	75		78.66	110	74	5			
	338	93.9	66		85.57	110	71	6.2			
GHS100-260B GHS100-260GB	177	49.2	76	2900	54.68	90	67	3.7	125	100	106
	274	76.1	66		68.4	90	72	4.8			
	325	90.3	58		75.49	90	68	5.9			
GHS125-200	237.6	66.0	57.5	2900	57.68	90	64.5	7	150	125	106
	360	100.0	50.5		66.46	90	74.5	7.2			
	475.2	132.0	40		76.12	90	68	7.8			
GHS32-130	4.5	1.3	6.2	1450	0.22	0.55	35	1.8	50	32	27.5
	7.5	2.1	5.6		0.25	0.55	46	2.0			
	9	2.5	5.2		0.26	0.55	49	2.3			
GHS32-160	6	1.7	9.7	1450	0.38	0.55	42	0.7	50	32	35
	9	2.5	9		0.46	0.55	48	1.0			
	11	3.1	8		0.48	0.55	49.5	1.4			
GHS32-200	6	1.7	16.3	1450	0.67	1.1	40	1.8	50	32	41
	9	2.5	15.4		0.79	1.1	48	2.0			
	11	3.1	14.5		0.85	1.1	51	2.3			
GHS32-260	7.2	2.0	25	1450	1.63	3	30	1.8	50	32	59
	12	3.3	23.5		1.94	3	39.5	2.0			
	14.4	4.0	22		2.05	3	42	2.3			
GHS40-130	10.8	3.0	6.55	1450	0.34	0.55	57	1.8	65	40	30
	18	5.0	5.8		0.42	0.55	67	2.0			
	21.6	6.0	5.4		0.47	0.55	67	2.4			
GHS40-160	10.8	3.0	10.2	1450	0.55	1.1	55	1.8	65	40	36
	18	5.0	8.8		0.70	1.1	62	2.0			
	21.6	6.0	7.8		0.76	1.1	60	2.4			
GHS40-200	10.8	3.0	16.2	1450	0.95	1.5	50	1.8	65	40	44
	18	5.0	14		1.23	1.5	56	2.0			
	21.6	6.0	12.4		1.33	1.5	55	2.4			
GHS40-260	12.6	3.5	24.4	1450	1.99	3	42	1.8	65	40	61
	21	5.8	22		2.42	3	52	2.0			
	25.2	7.0	20		2.61	3	52.5	2.4			
GHS40-320	9	2.5	38	1450	3.10	5.5	30	3.1	65	40	95.8
	14.4	4.0	37.5		3.50	5.5	42	2.1			
	18	5.0	37		4.03	5.5	45	3.8			
GHS40-320A	10.5	2.9	34.5	1450	3.23	5.5	30.5	3.3	65	40	95.8
	17	4.7	32		3.85	5.5	38.5	2			
	20.5	5.7	29		4.32	5.5	37.5	2.9			
GHS40-320B	10	2.8	31	1450	2.91	5.5	29	3.6	65	40	95.8
	16.5	4.6	29		3.52	5.5	37	2			
	20	5.6	26		3.93	5.5	36	2.7			
GHS50-130	18	5.0	6.6	1450	0.54	1.1	60	2.2	65	50	34
	30	8.3	6.3		0.68	1.1	75.5	2.4			
	36	10.0	5.7		0.76	1.1	74	2.8			
GHS50-160	20	5.6	10.4	1450	0.89	1.5	64	2.3	65	50	38
	32	8.9	9.8		1.15	1.5	74.3	2.4			
	38	10.6	9.4		1.31	1.5	74.5	3.0			
GHS50-200	18	5.0	16	1450	1.35	2.2	58	2.2	65	50	46
	30	8.3	14		1.79	2.2	64	2.3			
	36	10.0	13.5		2.04	2.2	65	2.9			
GHS50-260	20	5.6	25	1450	2.59	5.5	52.5	2.3	65	50	63
	32	8.9	24		3.24	5.5	64.5	2.4			
	38	10.6	23		3.58	5.5	66.5	3.0			
GHS50-320	32.4	9.0	37	1450	5.78	11	56.5	2.0	65	50	101
	54	15.0	30.5		7.80	11	57.5	2.5			
	64.8	18.0	23.5		8.73	11	47.5	3.2			



性能参数 Performance parameters

(4P)

泵型号 Pump model	流量 Capacity		扬程 Head h (m)	转速 Speed n (r/min)	功率 Power		效率 Eff. η (%)	必需汽 蚀余量 NPSHr (m)	泵口径 Pump diameter (mm)		泵重量 Weight (kg)
	m ³ /h	l/s			轴功率 Shaft power (kW)	电机 Motor (kW)			吸入 Suction	排出 Discharge	
GHS50-320A	23	6.4	33.5	1450	4.20	7.5	50	2.0	65	50	101
	38.5	10.7	31.3		5.29	7.5	62	2.4			
	46	12.8	30		5.97	7.5	63	3.0			
GHS50-320B	22	6.1	29.8	1450	3.57	7.5	50	2.0	65	50	101
	36.5	10.1	28.5		4.64	7.5	61	2.3			
	44	12.2	27		5.22	7.5	62	2.8			
GHS65-130	21.6	6.0	6.7	1450	0.79	1.5	50	2.2	80	65	39
	36	10.0	6.4		0.95	1.5	66	2.4			
	43.2	12.0	6		1.02	1.5	69	2.8			
GHS65-160	32.4	9.0	10	1450	1.38	2.2	64	2.0	80	65	43
	54	15.0	9.2		1.73	2.2	78	2.2			
	64.8	18.0	8.4		1.82	2.2	81.5	2.5			
GHS65-200	35	9.7	16.4	1450	2.37	4	66	1.9	80	65	52
	55	15.3	15		2.94	4	76.5	2.0			
	66	18.3	13.8		3.20	4	77.5	2.3			
GHS65-260	43.2	12.0	25.3	1450	4.48	7.5	66.5	2.0	80	65	81
	72	20.0	21.5		5.74	7.5	73.5	2.3			
	86.4	24.0	18.7		6.47	7.5	68	3.0			
GHS65-320	43.2	12.0	37.4	1450	7.46	15	59	1.9	80	65	110
	72	20.0	33		9.66	15	67	2.0			
	86.4	24.0	29		10.50	15	65	2.5			
GHS65-320A	37	10.3	34.5	1450	6.32	11	55	1.9	80	65	110
	62	17.2	32		8.31	11	65	2.0			
	74.5	20.7	28		9.16	11	62	2.3			
GHS65-320B	34	9.4	30.5	1450	6.01	11	47	2.0	80	65	110
	56.5	15.7	28		7.30	11	59	2.0			
	68	18.9	25.8		8.10	11	59	2.1			
GHS80-160	50	13.9	10.6	1450	2.31	3	62.5	2.1	100	80	54
	80	22.2	10		2.87	3	76	2.5			
	96	26.7	9.3		3.16	3	77	3.2			
GHS80-200	63	17.5	15.7	1450	3.59	7.5	75	2.1	100	80	70
	105.12	29.2	14		4.89	7.5	82	2.5			
	126	35.0	12.8		5.63	7.5	78	3.2			
GHS80-260	63	17.5	24	1450	5.88	11	70	2.1	100	80	91
	105.12	29.2	21		7.91	11	76	2.5			
	126	35.0	18.5		8.82	11	72	3.2			
GHS80-320	60	16.7	36	1450	9.41	18.5	62.5	1.9	100	80	120
	100	27.8	33		12.66	18.5	71	2.0			
	120	33.3	30		14.11	18.5	69.5	2.6			
GHS80-320A	57.5	16.0	34	1450	9.18	15	58	1.9	100	80	120
	95.5	26.5	29.7		11.19	15	69	2.0			
	114.5	31.8	26		11.92	15	68	2.3			
GHS80-320B	54.5	15.1	30.4	1450	8.06	15	56	1.9	100	80	120
	91	25.3	27.3		10.10	15	67	2.0			
	109	30.0	25		11.24	15	66	2.2			
GHS80-400	60	16.7	59	1450	17.37	30	55.5	2.2	100	80	161
	100	27.8	55.5		23.08	30	65.5	2.5			
	120	33.3	52.5		25.80	30	66.5	3.4			
GHS80-400A	59	16.4	55	1450	16.07	30	55	2.2	100	80	161
	96.5	26.8	52.5		21.56	30	64	2.4			
	116	32.2	49		24.57	30	63	3.2			
GHS80-400B	56	15.6	51	1450	14.40	30	54	2.2	100	80	161
	93	25.8	49		18.80	30	66	2.4			
	111.5	31.0	47		20.99	30	68	3.0			
GHS100-200	90	25.0	15	1450	4.60	11	80	2.2	125	100	85
	142	39.4	12.7		5.99	11	82	2.5			
	170	47.2	10.5		6.52	11	74.5	3.4			
GHS100-260	99	27.5	24	1450	8.51	15	76	2.3	125	100	115
	165	45.8	21		11.58	15	81.5	2.6			
	198	55.0	19		13.66	15	75	3.5			
GHS100-320	81	22.5	39	1450	11.95	22	72	2.0	125	100	134
	135	37.5	33.7		15.49	22	80	2.0			
	162	45.0	30		17.30	22	76.5	2.3			
GHS100-320A	77.5	21.5	34	1450	10.25	22	70	2.0	125	100	134
	130	36.1	29.5		13.74	22	76	2.0			
	155	43.1	26.5		15.32	22	73	2.2			
GHS100-320B	73.5	20.4	30	1450	8.96	18.5	67	2.0	125	100	134
	123	34.2	27		11.90	18.5	76	2.0			
	147.5	41.0	23		13.01	18.5	71	2.1			



性能参数 Performance parameters

(4P)

泵型号 Pump model	流量 Capacity		扬程 Head h (m)	转速 Speed n (r/min)	功率 Power		效率 Eff. η (%)	必需汽 蚀余量 NPSHr (m)	泵口径 Pump diameter (mm)		泵重量 Weight (kg)
	m ³ /h	l/s			轴功率 Shaft power (kW)	电机 Motor (kW)			吸入 Suction	排出 Discharge	
GHS100/400	90	25.0	58.8	1450	23.82	45	60.5	1.7	125	100	174
	150	41.7	51		30.86	45	67.5	2.0			
	180	50.0	44		33.44	45	64.5	2.7			
GHS100/400A	87	24.2	54	1450	22.85	37	56	1.7	125	100	174
	145	40.3	48.2		28.84	37	66	2.0			
	174	48.3	42		29.97	37	66.4	2.5			
GHS100/400B	84	23.3	49.5	1450	20.97	37	54	1.7	125	100	174
	139.5	38.8	45.2		26.83	37	64	1.9			
	167.5	46.5	41.2		29.36	37	64	2.4			
GHS125/200	115	31.9	15.2	1450	7.68	11	62	2.6	150	125	106
	190	52.8	13		8.74	11	77	3.5			
	230	63.9	11.5		9.42	11	76.5	3.0			
GHS125/260	144	40.0	24.2	1450	12.82	22	74	2.3	150	125	106
	240	66.7	21.2		17.11	22	81	2.5			
	288	80.0	17		18.52	22	72	3.2			
GHS125/260A	139	38.6	21.3	1450	11.86	22	68	2.3	150	125	106
	232	64.4	18.2		14.56	22	79	2.5			
	278.5	77.4	15.4		15.57	22	75	3.0			
GHS125/260B	134	37.2	19.7	1450	9.71	18.5	74	2.3	150	125	106
	223	61.9	16		12.79	18.5	76	2.4			
	267.5	74.3	13.4		14.36	18.5	68	2.8			
GHS125/320	120	33.3	35	1450	16.95	30	67.5	2.1	150	125	163
	200	55.6	32.5		22.41	30	79	2.0			
	240	66.7	30		25.14	30	78	2.7			
GHS125/320A	115	31.9	32.8	1450	15.11	30	68	2.15	150	125	163
	191	53.1	29.5		19.93	30	77	1.95			
	229	63.6	27.5		22.87	30	75	2.4			
GHS125/320B	109	30.3	28.9	1450	11.83	22	72.5	2.2	150	125	163
	182	50.6	25.2		16.43	22	76	2.0			
	218.5	60.7	12.9		10.37	22	74	2.2			
GHS125/400	144	40.0	59.5	1450	30.30	75	77	2.2	150	125	101
	245	68.1	52		45.35	75	76.5	2.4			
	300	83.3	45		52.15	75	70.5	3.0			
GHS125/400A	139	38.6	53.5	1450	31.40	55	64.5	2.2	150	125	181
	236.5	65.7	46		40.04	55	74	2.4			
	289	80.3	38.5		45.23	55	67	3.0			
GHS125/400B	133.5	37.1	51.2	1450	29.08	55	64	2.2	150	125	181
	227.5	63.2	40		35.15	55	70.5	2.3			
	278.5	77.4	32.5		40.41	55	61	2.8			
GHS125/500	150	41.7	83.5	1450	54.14	110	63	2.3	150	125	390
	250	69.4	78		75.86	110	70	2.5			
	300	83.3	72		90.50	110	65	2.6			
GHS125/500A	135	37.5	78.5	1450	48.10	75	60	1.8	150	125	390
	225	62.5	75		62.10	75	74	2.1			
	270	75.0	71		68.69	75	76	2.5			
GHS125/500B	120	33.3	75	1450	45.39	75	54	1.6	150	125	390
	200	55.6	72		58.53	75	67	2.0			
	240	66.7	69		64.43	75	70	2.4			
GHS125/500C	90	25.0	67	1450	32.84	55	50	1.6	150	125	309
	150	41.7	65.5		41.81	55	64	2.0			
	180	50.0	62		45.36	55	67	2.4			
GHS150/200	216	60.0	14.4	1450	12.10	18.5	70	3.0	200	150	156
	360	100.0	12.2		14.95	18.5	80	3.5			
	424.8	118.0	10.3		15.47	18.5	77	4.0			
GHS150/200A	172.8	48.0	13.4	1450	9.27	15	68	3.1	200	150	156
	288	80.0	12		12.07	15	78	3.8			
	345.6	96.0	10.5		13.00	15	76	4.2			
GHS150/260	194	53.9	23.5	1450	16.55	30	75	2.7	200	150	148
	324	90.0	20.5		22.06	30	82	3.0			
	414	115.0	16		26.53	30	68	3.3			
GHS150/260A	180	50.0	21.2	1450	14.43	30	72	2.6	200	150	148
	300	83.3	19		19.53	30	79.5	2.9			
	388.8	108.0	14.5		22.58	30	68	3.3			
GHS150/260B	162	45.0	19	1450	11.33	22	74	2.6	200	150	148
	270	75.0	16.5		15.36	22	79	2.8			
	342	95.0	12.5		17.12	22	68	3.2			
GHS150/320	230	63.9	36.5	1450	30.89	55	74	2.8	200	150	170
	370	102.8	33		41.05	55	81	3.2			
	445	123.6	28.5		46.05	55	75	3.6			



性能参数 Performance parameters

(4P)

泵型号 Pump model	流量 Capacity		扬程 Head h (m)	转速 Speed n (r/min)	功率 Power		效率 Eff. η (%)	必需汽 蚀余量 NPSHr (m)	泵口径 Pump diameter (mm)		泵重量 Weight (kg)
	m ³ /h	l/s			轴功率 Shaft power (kW)	电机 Motor (kW)			吸入 Suction	排出 Discharge	
GHS150/320A	220	61.1	33.4	1450	27.79	45	72	2.8	200	150	170
	354	98.3	29.3		35.76	45	79	3.1			
	426	118.3	25		39.19	45	74	3.5			
GHS150/320B	209.5	58.2	30	1450	24.11	37	71	2.8	200	150	170
	337.5	93.8	26		31.04	37	77	3			
	405.5	112.6	21.9		33.13	37	73	3.3			
GHS150/400	240	66.7	58	1450	50.54	90	75	2.8	200	150	209
	385	106.9	53.5		66.78	90	84	3.2			
	460	127.8	49		73.96	90	83	3.6			
GHS150/400A	232	64.4	52	1450	45.63	75	72	2.8	200	150	209
	372	103.3	47.5		61.69	75	78	3.2			
	444	123.3	42.5		66.74	75	77	3.6			
GHS150/400B	223	61.9	48	1450	41.64	75	70	2.8	200	150	209
	357.5	99.3	43.5		55.72	75	76	3.1			
	427.5	118.8	39		61.36	75	74	3.5			
GHS150/500	300	83.3	86.5	1450	89.5	160	79	3.1	200	150	410
	500	138.9	77.5		125.6	160	84	3.5			
	600	166.7	69		139.2	160	81	3.8			
GHS150/500A	270	75	79.5	1450	79.0	132	74	3.0	200	150	410
	450	125.0	72		110.3	132	80	3.4			
	540	150.0	63		120.3	132	77	3.6			
GHS150/500B	240	66.7	75.5	1450	71.5	132	69	2.8	200	150	410
	400	111.1	70		96.5	132	79	3.2			
	480	133.3	65		108.9	132	78	3.5			
GHS150/500C	210	58.3	68	1450	58.0	110	67	2.6	200	150	410
	350	97.2	63		78.0	110	77	3.0			
	420	116.7	60.5		91.1	110	76	3.3			
GHS200/260	259.2	72.0	19.5	1450	18.86	30	73	3.0	200	150	256
	432	120.0	15.2		21.81	30	82	3.2			
	518.4	144.0	12		22.89	30	74	3.3			
GHS200/260A	248.4	69.0	18	1450	16.91	22	72	2.9	200	150	256
	414	115.0	14		19.49	22	81	3.1			
	496.8	138.0	10.5		19.73	22	72	3.2			
GHS200/260B	237.6	66.0	15	1450	13.87	18.5	70	2.8	200	150	256
	396	110.0	12		16.18	18.5	80	3.0			
	475.2	132.0	9.7		17.93	18.5	70	3.1			
GHS200/320	345	95.8	35	1450	45.36	75	72.5	3.2	250	200	310
	575	159.7	30		56.26	75	83.5	3.3			
	690	191.7	25.5		60.27	75	79.5	3.4			
GHS200/320A	324	90.0	30	1450	37.28	55	71	3.1	250	200	310
	540	150.0	25.5		45.18	55	83	3.2			
	648	180.0	21		47.51	55	78	3.3			
GHS200/320B	302.4	84.0	26.5	1450	32.33	45	67.5	3.0	250	200	310
	504	140.0	22		36.82	45	82	3.1			
	604.8	168.0	18.3		38.89	45	77.5	3.2			
GHS200/400	390	108.3	59.5	1450	85.40	132	74	3.0	250	200	345
	650	180.6	53.5		112.74	132	84	3.8			
	780	216.7	48.5		125.64	132	82	4.5			
GHS200/400A	360	100.0	52.5	1450	73.53	110	70	2.9	250	200	345
	600	166.7	46.5		93.80	110	81	3.6			
	720	200.0	41.5		101.72	110	80	4.4			
GHS200/400B	330	91.7	41.5	1450	54.05	90	69	2.8	250	200	345
	550	152.8	36		66.57	90	81	3.5			
	660	183.3	31		71.43	90	78	4.2			
GHS200/500	330	91.7	90	1450	118.94	250	68	3.2	250	200	510
	550	152.8	87		160.88	250	81	4.0			
	660	183.3	84.5		189.85	250	80	4.8			
GHS200/500A	300	83.3	82.5	1450	97.68	200	69	3.0	250	200	510
	500	138.9	80		132.04	200	82.5	3.8			
	600	166.7	77.5		150.75	200	84	4.5			
GHS200/500B	270	75.0	73	1450	85.20	160	63	2.8	250	200	510
	450	125.0	71.5		112.34	160	78	3.6			
	540	150.0	69		126.84	160	80	4.2			
GHS250/320	522	145.0	32	1450	65.93	90	69	3.0	300	250	375
	870	241.7	27.5		78.03	90	83.5	4.8			
	1044	290.0	24		83.21	90	82	6.5			
GHS250/320A	480	133.3	29.5	1450	61.21	90	63	2.8	300	250	375
	800	222.2	25.5		67.75	90	82	4.5			
	960	266.7	22.5		70.45	90	83.5	6.2			




性能参数 Performance parameters

(4P)

泵型号 Pump model	流量 Capacity		扬程 Head h (m)	转速 Speed n (r/min)	功率 Power		效率 Eff. η (%)	必需汽 蚀余量 NPSHr (m)	泵口径 Pump diameter (mm)		泵重量 Weight (kg)
	m ³ /h	l/s			轴功率 Shaft power (kW)	电机 Motor (kW)			吸入 Suction	排出 Discharge	
GHS250/320B	450	125.0	28	1450	55.34	75	62	2.5	300	250	375
	750	208.3	24.5		61.78	75	81	4.2			
	900	250.0	22		65.76	75	82	6.0			
GHS250/320C	432	120.0	23.5	1450	45.32	75	61	2.4	300	250	375
	720	200.0	20		49.02	75	80	4.0			
	864	240.0	17.5		54.18	75	76	5.8			
GHS250/400	550	152.8	56.5	1450	112.09	200	75.5	3.0	300	250	455
	760	211.1	54		131.49	200	85	3.5			
	950	263.9	48.5		151.18	200	83	4.5			
GHS250/400A	360	100.0	45	1450	71.16	110	62	2.6	300	250	455
	600	166.7	43		87.83	110	80	3.2			
	720	200.0	40.5		95.68	110	83	4.2			
GHS250/400B	300	83.3	35	1450	51.52	75	55.5	2.3	300	250	455
	500	138.9	33		59.91	75	75	3.0			
	600	166.7	31		64.12	75	79	4.0			
GHS250/500	534	148.3	85.5	1450	177.63	315	70	3.0	300	250	630
	890	247.2	80		236.46	315	82	5.0			
	1068	296.7	74		265.71	315	81	7.0			
GHS250/500A	480	133.3	76	1450	148.28	250	67	2.8	300	250	630
	800	222.2	70.5		191.99	250	80	4.6			
	960	266.7	65.5		214.05	250	80	6.7			
GHS250/500B	450	125.0	68	1450	128.21	200	65	2.6	300	250	630
	750	208.3	63		163.92	200	78.5	4.4			
	900	250.0	58.4		181.19	200	79	6.5			
GHS300/400	831.6	231.0	52	1450	168.24	250	70	5.0	350	300	700
	1386	385.0	46.5		204.09	250	86	7.0			
	1663.2	462.0	42		217.41	250	87.5	8.0			
GHS300/400A	720	200.0	45	1450	135.75	200	65	4.8	350	300	700
	1200	333.3	40.5		163.40	200	81	6.5			
	1440	400.0	37		176.95	200	82	7.5			
GHS300/400B	594	165.0	38.5	1450	114.27	160	54.5	4.5	350	300	700
	990	275.0	35		127.52	160	74	6.0			
	1188	330.0	32.5		133.10	160	79	7.0			

整机外形尺寸 Outline dimensions

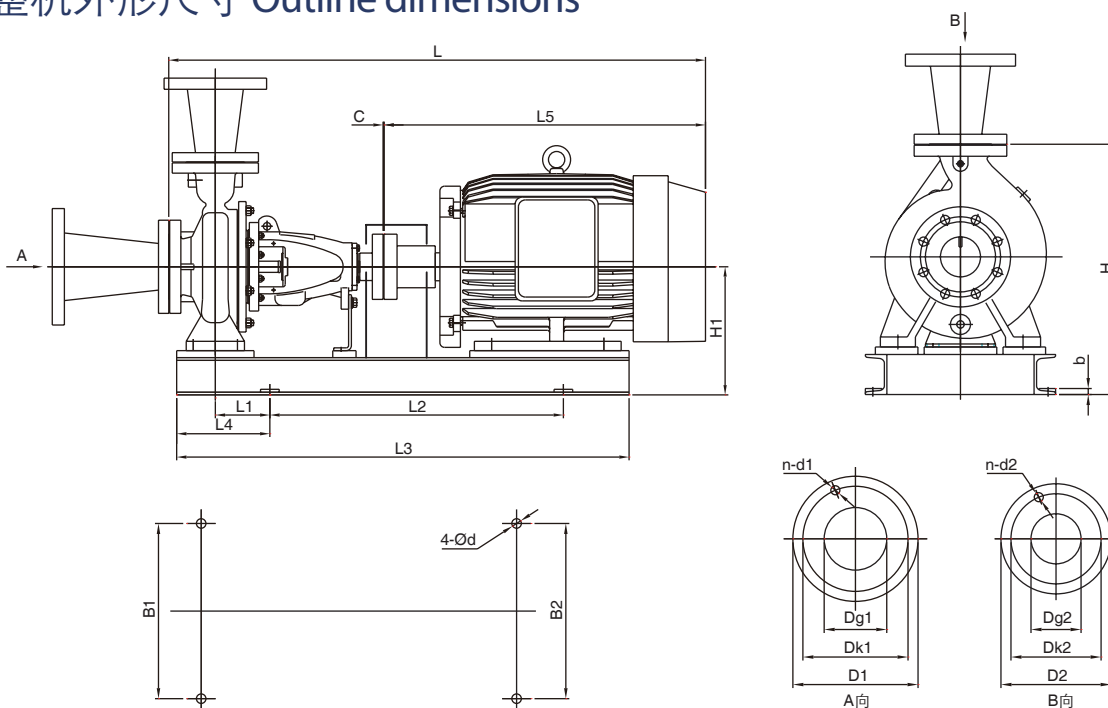

外形及安装尺寸表 Installation dimensions

本表仅适用于配钢制底座

This chart is apply to the pump with steel base.

泵型号 Pump model	配套电机 Motor		泵安装尺寸 Installation size of pump														吸入锥管 Suction bell				吐出锥管 Discharge cone				总重量 Total weight (kg)
	机座号 Base number	功率 (kW)	L	L1	L2	L3	L4	L5	B1	B2	H1	H	c	b	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2		
GHS32/130	Y90L-2	2.2	782	57	450	703	127	340	225	225	187	327	2	12	Ø19	/	/	/	/	Ø50	Ø125	Ø165	4-Ø18	79	
	Y90S-2	1.5	757	57	450	678	127	315	225	225	187	327	2	12	Ø19	/	/	/	/	Ø50	Ø125	Ø165	4-Ø18	79	
	Y80L-4	0.55	722	37	430	657	107	280	225	225	187	327	2	12	Ø19	/	/	/	/	/	/	/	/	70	
GHS32/160	Y132S1-2	5.5	907	77	500	786	147	465	285	285	207	367	2	12	Ø19	/	/	/	/	Ø50	Ø125	Ø165	4-Ø18	131	
	Y112M-2	4	842	67	450	742	137	400	255	255	207	367	2	12	Ø19	/	/	/	/	Ø50	Ø125	Ø165	4-Ø18	108	
	Y80L-4	0.55	842	37	430	657	107	400	255	255	207	367	2	12	Ø19	/	/	/	/	/	/	/	/	78	
GHS32/200	Y160M1-2	11	1042	88	580	905	158	600	325	325	235	415	2	12	Ø19	/	/	/	/	Ø50	Ø125	Ø165	4-Ø18	206	
	Y132S2-2	7.5	907	61	500	786	131	465	285	285	235	415	2	12	Ø19	/	/	/	/	Ø50	Ø125	Ø165	4-Ø18	145	
	Y90S-4	1.1	757	51	450	678	121	315	285	285	235	415	2	12	Ø19	/	/	/	/	/	/	/	/	94	
GHS32/260	Y160L-2	18.5	1102	114	580	960	197	640	325	325	275	500	2	12	Ø19	/	/	/	/	Ø50	Ø125	Ø165	4-Ø18	251	
	Y160M2-2	15	1062	114	580	918	197	600	325	325	275	500	2	12	Ø19	/	/	/	/	Ø50	Ø125	Ø165	4-Ø18	237	
	Y100L2-4	3	837	73	450	745	156	375	315	315	255	480	2	12	Ø19	/	/	/	/	/	/	/	/	129	
GHS40/130	Y112M-2	4	842	83	450	742	153	400	255	255	187	327	2	12	Ø19	/	/	/	/	Ø65	Ø145	Ø185	4-Ø18	101	
	Y100L-2	3	817	67	450	733	137	375	225	225	187	327	2	12	Ø19	/	/	/	/	Ø65	Ø145	Ø185	4-Ø18	90	
	Y80L-4	0.55	722	37	430	657	107	280	225	225	187	327	2	12	Ø19	/	/	/	/	/	/	/	/	72	
GHS40/160	Y132S2-2	7.5	907	77	500	786	147	465	285	285	207	367	2	12	Ø19	/	/	/	/	Ø65	Ø145	Ø185	4-Ø18	137	
	Y132S1-2	5.5	907	77	500	786	147	465	285	285	207	367	2	12	Ø19	/	/	/	/	Ø65	Ø145	Ø185	4-Ø18	132	
	Y112M-2	4	842	67	450	742	137	400	255	255	207	367	2	12	Ø19	/	/	/	/	Ø65	Ø145	Ø185	4-Ø18	109	
	Y90S-4	1.1	757	57	450	678	127	315	255	255	207	367	2	12	Ø19	/	/	/	/	/	/	/	/	85	
GHS40/200	Y160M1-2	11	1062	88	580	905	158	600	325	325	255	435	2	12	Ø19	/	/	/	/	Ø65	Ø145	Ø185	4-Ø18	210	
	Y90L-4	1.5	802	51	450	703	121	340	285	285	235	415	2	12	Ø19	/	/	/	/	/	/	/	/	103	
GHS40/260	Y180M-2	22	1152	121	580	971	204	690	350	350	275	500	2	12	Ø19	/	/	/	/	Ø65	Ø145	Ø185	4-Ø18	286	
	Y160L-2	18.5	1102	114	580	960	197	640	325	325	275	500	2	12	Ø19	/	/	/	/	Ø65	Ø145	Ø185	4-Ø18	253	
	Y100L2-4	3	837	73	450	745	156	375	315	315	255	480	2	12	Ø19	/	/	/	/	Ø65	Ø145	Ø185	4-Ø18	131	
GHS40/320	Y200L2-2	37	1357	120	750	1155	203	760	395	395	342	567	2	16	Ø24	Ø80	Ø160	Ø200	8-Ø18	Ø65	Ø145	Ø185	4-Ø18	413	
	Y200L1-2	30	1357	120	750	1155	203	760	395	395	342	567	2	16	Ø24	Ø80	Ø160	Ø200	8-Ø18	Ø65	Ø145	Ø185	4-Ø18	394	
	Y180M-2	22	1287	114	680	1081	197	690	350	350	315	540	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø65	Ø145	Ø185	4-Ø18	350	
	Y132S-4	5.5	1062	105	580	909	188	465	350	350	295	520	2	12	Ø19	/	/	/	/	Ø65	Ø145	Ø185	4-Ø18	214	
GHS50/130	Y132S2-2	7.5	927	77	500	786	147	465	285	285	207	367	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	135	
	Y132S1-2	5.5	927	77	500	786	147	465	285	285	207	367	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	130	
	Y90S-4	1.1	777	57	450	678	127	315	255	255	207	367	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø65	Ø145	Ø185	4-Ø18	83	
GHS50/160	Y160M1-2	11	1062	88	580	905	158	600	325	325	255	435	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	204	
	Y132S2-2	7.5	927	77	580	786	147	465	285	285	255	435	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	143	
	Y90L-4	1.5	802	51	450	703	121	340	285	285	235	415	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø65	Ø145	Ø185	4-Ø18	97	
GHS50/200	Y160L-2	18.5	1102	88	580	947	158	640	325	325	255	455	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	236	
	Y160M2-2	15	1062	88	580	905	158	600	325	325	255	455	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	222	
	Y100L1-4	2.2	837	69	450	733	139	375	285	285	235	435	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø65	Ø145	Ø185	4-Ø18	111	
GHS50/260	Y200L2-2	37	1222	137	630	1045	220	760	395	395	315	540	2	16	Ø24	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	386	
	Y200L1-2	30	1222	137	630	1045	220	760	395	395	315	540	2	16	Ø24	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	370	
	Y132S-4	5.5	927	94	500	799	177	465	315	315	255	480	2	12	Ø19	Ø80	Ø160	Ø200	8-Ø18	Ø65	Ø145	Ø185	4-Ø18	164	
GHS50/260G	Y200L2-2	37	1316	129	700	1139	212	760	395	395	315	540	2	16	Ø24	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	402	
	Y200L1-2	30	1316	129	700	1139	212	760	395	395	315	540	2	16	Ø24	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	386	
GHS50/320	Y280S-2	75	1582	158	820	1339	241	985	540	540	465	745	2	16	Ø28	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	793	
	Y225M-2	45	1402	138	750	1192	221	805	420	420	385	665	2	16	Ø28	Ø80	Ø160	Ø200	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	618	
	Y160M-4	11	1197	94	680	1028	177	600	395	395	340	620	2	16	Ø24	Ø80	Ø160	Ø200	8-Ø18	Ø65	Ø145	Ø185	4-Ø18	293	
	Y132M-4	7.5	1102	79	680	948	162	505	395	395	340	620	2	16	Ø24	Ø80	Ø160	Ø200	8-Ø18	Ø65	Ø145	Ø185	4-Ø18	246	
GHS65/130	Y160M1-2	11	1062	88	580	918	171	600	325	325	255	435	2	12	Ø19	Ø100	Ø180	Ø220	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	205	
	Y132S2-2	7.5	927	61	500	799	144	465	285	285	235	415	2	12	Ø19	Ø100	Ø180	Ø220	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	144	
	Y90L-4	1.5	802	51	450	716	134	340	285	285	235	415	2	12	Ø19	Ø100	Ø180	Ø220	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	98	
GHS65/160	Y160L-2	18.5	1102	88	580	960	171	640	325	325	255	455	2	12	Ø19	Ø100	Ø180	Ø220	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	233	
	Y160M2-2	15	1062	88	580	918	171	600	325	325	255	455	2	12	Ø19	Ø100	Ø180	Ø220	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	219	



外形及安装尺寸表 Installation dimensions

本表仅适用于配钢制底座

This chart is apply to the pump with steel base.

泵型号 Pump model	配套电机 Motor		泵安装尺寸 Installation size of pump													吸入锥管 Suction bell				吐出锥管 Discharge cone				总重量 Total weight (kg)
	机座号 Base number	功率 (kW)	L	L1	L2	L3	L4	L5	B1	B2	H1	H	c	b	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2	
GHS65/160	Y160M1-2	11	1062	88	580	918	171	600	325	325	255	455	2	12	Ø19	Ø100	Ø180	Ø220	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	209
	Y100L1-4	2.2	837	69	450	745	152	375	285	285	235	435	2	12	Ø19	Ø100	Ø180	Ø220	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	108
GHD65/200	Y200L1-2	30	1222	137	630	1045	220	760	395	395	315	540	2	16	Ø24	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	373
	Y180M-2	22	1152	117	630	971	200	690	350	350	275	500	2	12	Ø19	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	295
	Y112M-4	4	862	73	450	745	156	400	315	315	255	480	2	12	Ø19	Ø125	Ø210	Ø250	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	137
GHD65/200G	Y200L1-2	30	1316	130	700	1139	213	760	395	395	315	540	2	16	Ø24	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	388
GHS65/260	Y250M-2	55	1482	162	800	1302	262	910	495	495	393	643	2	16	Ø24	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	584
	Y225M-2	45	1377	140	750	1209	240	805	430	430	340	590	2	16	Ø24	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	479
	Y132M-4	7.5	1077	105	580	965	205	505	350	350	295	545	2	12	Ø19	Ø125	Ø210	Ø250	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	212
GHS65/320	Y315S-2	110	1787	190	850	1441	290	1190	395	620	500	780	2	16	Ø28	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	1296
	Y280M-2	90	1632	190	800	1407	290	1035	395	540	465	745	2	16	Ø28	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	925
	Y280S-2	75	1582	150	750	1356	250	985	395	540	465	745	2	16	Ø28	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	845
	Y160L-4	15	1237	94	680	1087	194	640	395	395	340	620	2	16	Ø24	Ø125	Ø210	Ø250	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	315
	Y160M-4	11	1197	94	680	1045	194	600	395	395	340	620	2	16	Ø24	Ø125	Ø210	Ø250	8-Ø18	Ø80	Ø160	Ø200	8-Ø18	302
GHS80/160	Y200L1-2	30	1247	137	630	1045	220	760	395	395	315	540	2	16	Ø24	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	357
	Y180M-2	22	1177	121	580	971	204	690	350	350	275	500	2	12	Ø19	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	279
	Y160L-2	18.5	1127	114	580	960	197	640	325	325	275	500	2	12	Ø19	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	246
	Y100L2-4	3	862	73	450	745	156	375	315	315	255	480	2	12	Ø19	Ø150	Ø240	Ø285	8-Ø22	Ø100	Ø180	Ø220	8-Ø18	124
GHS80/160G	Y200L1-2	30	1341	138	700	1139	221	760	395	395	315	540	2	16	Ø24	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	372
	Y180M-2	22	1271	138	640	1065	221	690	350	350	275	500	2	12	Ø19	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	292
	Y160L-2	18.5	1221	138	640	1054	221	640	325	325	275	500	2	12	Ø19	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	259
GHS80/200	Y225M-2	45	1402	158	750	1192	241	805	430	430	340	590	2	16	Ø24	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	462
	Y200L2-2	37	1357	144	700	1155	227	760	395	395	315	565	2	12	Ø24	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	397
	Y132M-4	7.5	1102	113	550	948	196	505	350	350	275	525	2	12	Ø19	Ø150	Ø240	Ø285	8-Ø22	Ø100	Ø180	Ø220	8-Ø18	197
GHS80/260	Y280S-2	75	1582	160	850	1356	260	985	410	555	440	720	2	16	Ø28	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	758
	Y250M-2	55	1507	160	780	1302	260	910	475	475	410	690	2	16	Ø28	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	594
	Y160M-4	11	1197	120	630	1045	220	600	395	395	315	595	2	16	Ø24	Ø150	Ø240	Ø285	8-Ø22	Ø100	Ø180	Ø220	8-Ø18	279
GHS80/320	Y315S-2	110	1787	190	850	1441	290	1190	395	620	500	815	2	16	Ø28	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	1342
	Y280M-2	90	1632	190	800	1407	290	1035	395	540	465	780	2	16	Ø28	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	958
	Y180M-4	18.5	1288	104	750	1100	204	690	395	395	365	680	3	16	Ø24	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	370
	Y160L-4	15	1238	104	750	1088	204	640	395	395	365	680	3	16	Ø24	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	327
	Y160M-4	11	1198	104	750	1046	204	600	395	395	365	680	3	16	Ø24	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	307
GHS80/400	Y200L-4	30	1408	140	780	1224	240	760	420	420	421	776	3	16	Ø24	Ø125	Ø210	Ø250	8-Ø18	Ø100	Ø180	Ø220	8-Ø18	504
GHS100/200	Y280S-2	75	2300	160	850	2124	260	985	410	555	440	720	3	16	Ø28	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	752
	Y250M-2	55	1508	160	800	1353	260	910	495	495	396	676	3	16	Ø24	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	588
	Y225M-2	45	1403	160	750	1260	260	805	430	430	340	620	3	16	Ø24	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	483
	Y160M-4	11	1198	120	630	1096	220	600	395	395	315	595	3	16	Ø24	Ø200	Ø295	Ø340	12-Ø22	Ø125	Ø210	Ø250	8-Ø18	273
GHS100/260	Y315S-2	110	1803	190	870	1442	290	1190	410	620	500	780	3	16	Ø28	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	1146
	Y280M-2	90	1648	172	870	1408	272	1035	410	550	465	745	3	16	Ø28	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	857
	Y160L-4	15	1253	94	680	1088	194	640	395	395	340	620	3	16	Ø24	Ø200	Ø295	Ø340	12-Ø22	Ø125	Ø210	Ø250	8-Ø18	311
GHS100/260G	Y315S-2	110	1853	200	870	1492	300	1190	410	620	500	780	3	16	Ø28	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	1161
	Y280M-2	90	1698	200	870	1458	300	1035	410	550	465	745	3	16	Ø28	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	870
GHS100/320	Y180L-4	22	1343	104	750	1139	204	730	395	395	365	680	3	16	Ø24	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	402
	Y180M-4	18.5	1303	104	750	1100	204	690	395	395	365	680	3	16	Ø24	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	384
GHS100/400	Y225M-4	45	1508	140	820	1320	260	835	540	540	440	795	3	16	Ø28	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	630
	Y225S-4	37	1483	140	820	1295	260	810	540	540	440	795	3	16	Ø28	Ø150	Ø240	Ø285	8-Ø22	Ø125	Ø210	Ø250	8-Ø18	595
GHS125/200	Y280M-2	90	1648	184	880	1408	284	1035	410	550	440	755	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	865
	Y160M-4	11	1213	104	750	1046	204	600	395	395	365	680	3	16	Ø24	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	300
GHS125/260	Y180L-4	22	1343	104	750	1139	204	730	395	395	365	720	3	16	Ø24	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	383
	Y180M-4	18.5	1303	104	750	1100	204	690	395	395	365	720	3	16	Ø24	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	365
GHS125/320	Y200L-4	30	1433	119	800	1254	239	760	490	490	421	776	3	16	Ø24	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	516



外形及安装尺寸表 Installation dimensions

本表仅适用于配钢制底座

This chart is apply to the pump with steel base.

泵型号 Pump model	配套电机 Motor		泵安装尺寸 Installation size of pump													吸入锥管 Suction bell				吐出锥管 Discharge cone				总重量 Total weight (kg)
	机座号 Base number	功率 (kW)	L	L1	L2	L3	L4	L5	B1	B2	H1	H	c	b	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2	
GHS125/320	Y180L-4	22	1403	117	780	1219	237	730	490	365	421	776	3	16	Ø24	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	449
	Y280S-4	75	1658	190	910	1437	310	985	550	550	475	875	3	16	Ø28	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	891
GHS125/400	Y250M-4	55	1583	150	870	1383	270	910	490	490	475	875	3	16	Ø28	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	726
	Y315S-4	110	2053	230	910	1692	350	1220	620	620	560	1060	3	16	Ø28	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	1521
GHS125/500	Y280S-4	75	1818	220	870	1577	340	985	550	550	535	1035	3	16	Ø28	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	1044
	Y250M-4	55	1743	220	820	1523	340	910	550	550	535	1035	3	16	Ø28	Ø200	Ø295	Ø340	12-Ø22	Ø150	Ø240	Ø285	8-Ø22	926
GHS150/200	Y180M-4	18.5	1348	114	780	1145	234	690	540	365	426	826	3	16	Ø24	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	425
	Y160L-4	15	1298	114	750	1133	234	640	540	330	426	826	3	16	Ø24	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	399
GHS150/260	Y200L-4	30	1453	119	800	1254	239	760	440	440	396	751	3	16	Ø24	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	495
	Y180L-4	22	1423	119	750	1219	239	730	440	440	396	751	3	16	Ø24	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	444
GHS150/320	Y250M-4	55	1603	150	870	1383	270	910	540	540	440	840	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	696
	Y225M-4	45	1528	140	820	1320	260	835	540	540	440	840	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	626
GHS150/400	Y225S-4	37	1503	140	820	1295	260	810	540	540	440	840	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	591
	Y280M-4	90	1728	190	910	1488	310	1035	550	550	475	925	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	942
GHS150/500	Y280S-4	75	1678	190	910	1437	310	985	550	550	475	925	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	927
	Y315L1-4	160	2183	230	1000	1773	350	1330	625	625	560	1060	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	1846
GHS150/500	Y315M-4	132	2418	220	1000	1773	340	1565	625	625	560	1060	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	1638
	Y315S-4	110	2073	220	910	1692	340	1220	625	625	560	1060	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	1544
GHS200/260	Y200L-4	30	1493	120	750	1274	240	760	540	540	440	840	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	566
	Y180L-4	22	1463	120	750	1239	240	730	540	540	440	840	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	524
GHS200/320	Y180M-4	18.5	1423	120	750	1200	240	690	540	540	440	840	3	16	Ø28	Ø250	Ø355	Ø405	12-Ø26	Ø200	Ø295	Ø340	12-Ø22	508
	Y280S-4	75	1858	190	910	1577	310	985	550	550	540	990	3	16	Ø28	Ø300	Ø410	Ø460	12-Ø26	Ø300	Ø410	Ø460	12-Ø26	952
GHS200/400	Y250M-4	55	1783	190	910	1523	310	910	550	550	515	965	3	16	Ø28	Ø300	Ø410	Ø460	12-Ø26	Ø300	Ø410	Ø460	12-Ø26	802
	Y225M-4	45	1678	140	820	1460	260	805	550	550	515	965	3	16	Ø28	Ø300	Ø410	Ø460	12-Ø26	Ø300	Ø410	Ø460	12-Ø26	733
GHS200/500	Y315M-4	132	2203	230	1000	1773	350	1330	625	625	540	1040	3	16	Ø28	Ø300	Ø410	Ø460	12-Ø26	Ø300	Ø410	Ø460	12-Ø26	1563
	Y315S-4	110	2093	230	1000	1692	350	1220	625	625	540	1040	3	16	Ø28	Ø300	Ø410	Ø460	12-Ø26	Ø300	Ø410	Ø460	12-Ø26	1469
GHS250/320	Y280M-4	90	1908	190	910	1628	310	1035	550	550	540	1040	3	16	Ø28	Ø300	Ø410	Ø460	12-Ø26	Ø300	Ø410	Ø460	12-Ø26	1096
	Y355M-4	250	2453	230	1100	1922	400	1565	725	725	625	1125	3	16	Ø28	Ø300	Ø410	Ø460	12-Ø26	Ø300	Ø410	Ø460	12-Ø26	2587
GHS250/400	Y315L2-4	200	2218	230	1100	1828	400	1330	715	715	625	1125	3	16	Ø28	Ø300	Ø410	Ø460	12-Ø26	Ø300	Ø410	Ø460	12-Ø26	1962
	Y315L1-4	160	2218	230	1100	1828	400	1330	715	715	625	1125	3	16	Ø28	Ø300	Ø410	Ø460	12-Ø26	Ø300	Ø410	Ø460	12-Ø26	1833
GHS250/500	Y280M-4	90	1908	190	910	1653	335	1035	595	595	540	1065	3	16	Ø28	Ø350	Ø470	Ø520	16-Ø26	Ø350	Ø470	Ø520	16-Ø26	1131
	Y280S-4	75	1858	190	910	1602	335	985	595	595	540	1065	3	16	Ø28	Ø350	Ø470	Ø520	16-Ø26	Ø350	Ø470	Ø520	16-Ø26	1027
GHS250/400	Y315L2-4	200	2253	230	1000	1823	400	1330	705	705	625	1125	3	16	Ø28	Ø350	Ø470	Ø520	16-Ø26	Ø350	Ø470	Ø520	16-Ø26	1799
	Y315M-4	132	2253	230	1000	1742	400	1330	705	705	585	1085	3	16	Ø28	Ø350	Ø470	Ø520	16-Ø26	Ø350	Ø470	Ø520	16-Ø26	1592
GHS250/500	Y315S-4	110	2143	230	1000	1742	400	1220	705	705	585	1085	3	16	Ø28	Ø350	Ø470	Ø520	16-Ø26	Ø350	Ø470	Ø520	16-Ø26	1498
	Y280S-4	75	1908	190	910	1627	360	985	705	705	585	1085	3	16	Ø28	Ø350	Ø470	Ø520	16-Ø26	Ø350	Ø470	Ø520	16-Ø26	1021
GHS300/400	Y355L2-4	315	2683	230	1100	2122	400	1565	725	725	650	1195	3	16	Ø28	Ø350	Ø470	Ø520	16-Ø26	Ø350	Ø470	Ø520	16-Ø26	2877
	Y355M-4	250	2683	230	1100	2122	400	1565	725	725	650	1195	3	16	Ø28	Ø350	Ø470	Ø520	16-Ø26	Ø350	Ø470	Ø520	16-Ø26	2726
GHS300/400	Y355M-4	250	2723	230	1100	2122	400	1565	795	795	725	1325	3	16	Ø28	Ø400	Ø525	Ø580	16-Ø30	Ø400	Ø525	Ø580	16-Ø30	2807
	Y315L2-4	200	2488	230	1100	2028	400	1330	795	795	725	1325	3	16	Ø28	Ø400	Ø525	Ø580	16-Ø30	Ø400	Ø525	Ø580	16-Ø30	2182
	Y315L1-4	160	2488	230	1100	2028	400	1330	795	795	725	1325	3	16	Ø28	Ø400	Ø525	Ø580	16-Ø30	Ø400	Ø525	Ø580	16-Ø30	2053

注: 电机为GSD标配Y₂系列。Sign: The above motor size is of pump with GSD standard configuration motor Y₂ series.

如蒙洽询请指示下列各项：
For further details, please fulfill the chart below.

客户
Customer _____

承办人员
Undertaker _____

工程名称
Name of project _____

工程地点
Address of project _____

电话
Telephone _____

传真
Fax _____

订购机型
Type _____

订购数量
Quantity _____

性能参数 Performance parameters	介质名称 Medium name			* 介质温度(°C) Medium temperature	
	* 流量(m ³ /h) Capacity			* 扬程(m) Head	
	* 进口压力(MPa) Inlet pressure				
	轴封型式 Seal form	☐ 机械密封 (标准配置) Mechanical seal(standard) ☐ 其他 Other _____			
	主要部件材质 Major parts' material	泵体 Pump body	☐ HT250 标准配置 Standard ☐ 其他 Other		
		叶轮 Impeller	☐ HT250 标准配置 Standard ☐ 其他 Other		
		轴 Shaft	☐ 2Cr13 标准配置 Standard ☐ 其他 Other		
	泵安装型式 Installation type	☐ 从传动端看泵方向为顺时针方向旋转(标准配置) Clockwise rotation looking from motor to pump body(standard). ☐ 从传动端看泵方向为逆时针方向旋转 Anti-clock wise rotation looking from motor to pump body.			
	电源 Power	电压(V) Voltage		频率(Hz) Frequency	
	电机 Moter	型号 Type		功率(kW) Power	
防护等级 IP code			绝缘要求 Class of insulation		
其他要求 Other requirement					
备注 Notes	1. 出厂标准配置不含地脚螺栓和吐出锥管。 The foundation bolt and discharge cone are not in the ex-factory standard layout. 2. 以上资料请尽可能填写完整, 以便于选择最佳机型, 项目前加注“*”者, 请务必填写。 Please fill in the parameter lists as complete as possible. The item with "*" must be filled.				



欢迎索取以下产品型录



泵系列

- 潜水泵系列
- 陆上泵系列
- 特种泵系列
- 消防泵系列



搅拌推流系列

- 搅拌机系列
- 推流器系列



供氧曝气系列

- 曝气机系列
- 曝气盘系列
- 曝气管系列



风机系列

- 三叶罗茨鼓风机系列
- 增压罗茨鼓风机系列



污泥处理设备 及其他

- 固液分离系列
- 泡药设备
- 输送设备



上海川源机械工程有限公司
Shanghai GSD Industrial Co., Ltd

免费咨询电话

800-820-1977

本型录内容如有变更，恕不另行通知。

We reserve the right to change content without notice.

CY-B7